

INSTALLATION INSTRUCTIONS




XJ ADJUSTABLE LEAF SPRING HANGER


PART#: R2671-A

KIT INCLUDES


PART#: R2671

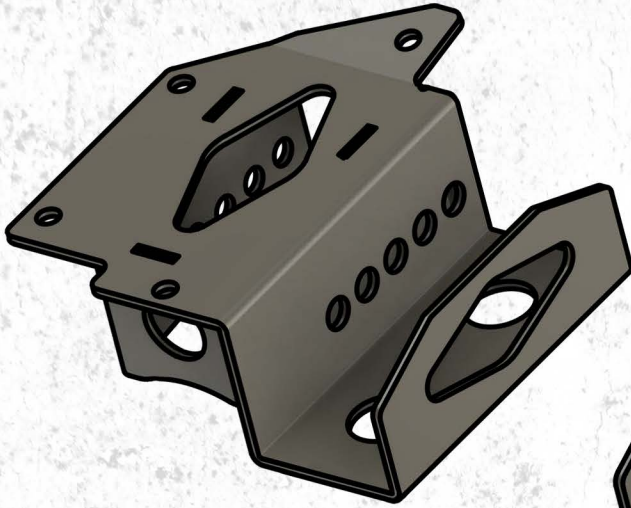


PASSENGER SIDE LEAF SPRING HANGER

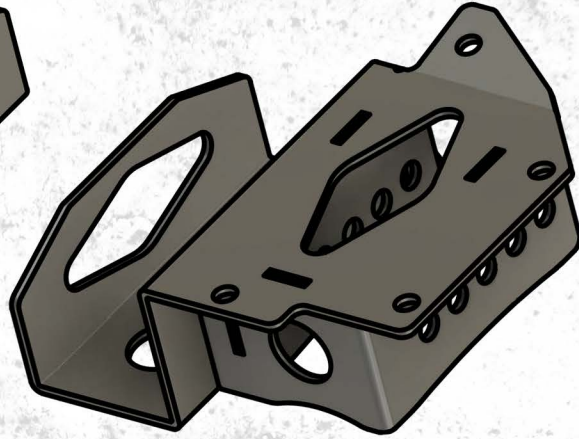

DRIVER SIDE LEAF SPRING HANGER

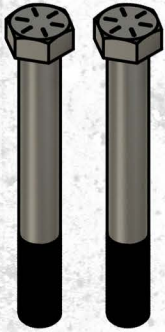


9/16" - 18 x 4.5" BOLT
[2x]

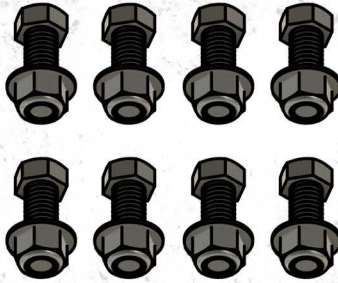


7/16" - 14 x 1.25" ZINC PLATED BOLT
7/16" - 14 ZINC PLATED LOCK NUT
7/16" ZINC PLATED FLAT WASHER
[8x EACH]



9/16" FLAT WASHER
9/16" x 18 WELDED NUT TAB
[2x EACH]



INNER WASHER
[2x]



INNER WASHER
[6x]

INSTALLATION INSTRUCTIONS

1. Measure the distance between the bolt hole on the spring hanger and the bolt hole on the shackle hanger.
2. Remove the bolt that connects the top of the spring hanger to the floor of the vehicle.
3. Cut off the factory spring mount and clean up the frame.
4. Align the center hole of the new spring hanger with the measurement taken in step 1 to ensure proper positioning.
5. Drill four new holes in the frame for mounting the new spring hanger.
6. Install the bolts into the new holes.
7. Weld the new spring hanger into place to ensure it is secure.

By following these steps, you'll be able to replace the old spring hanger with the new adjustable one, making it easier to adjust your vehicle's suspension as needed.

